



# SR25

**CARDIOID**

MICROPHONE FOR GUITAR

Follow us on social media **@EarthworksAudio**

For more information, please visit

[earthworksaudio.com](http://earthworksaudio.com) or call 1-603-654-2433.

EARTHWORKS AUDIO



# Thank you for purchasing the Earthworks SR25 Condenser Microphone

---

## YOUR PURCHASE INCLUDES

1 SR25  
1 Microphone Clip  
1 Microphone Bag  
1 Foam Windscreen  
1 Tip Protector

## GETTING STARTED

The SR25 is a condenser microphone with active electronics. This means:

- Its output level will be naturally higher than many of the dynamic microphones that it may be replacing. It is not uncommon to need to reduce gain if you were previously using a dynamic microphone.
- You will need to engage phantom power on your interface or preamp. Pro Tip: It's always a good idea to plug in a condenser microphone while phantom power is off and the channel is muted. After engaging phantom power, give the microphone a short time to settle before unmuting.

## PROPER MAINTENANCE

To guarantee your microphone provides years of performance, follow these guidelines:

- Avoid touching the front protective screen.
- Never attempt to disassemble the microphone.
- Avoid extreme heat and condensing humidity. Allow the microphone to warm up when bringing it in from the cold.



- Rough handling may damage the microphone even if no markings are visible
- When not in use, keep the SR25 in its bag.

## IMPORTANT NOTICE


The small tip on many of our microphones allows them to capture the highest frequencies of your sound. Please be gentle and considerate when handling the microphones with these tips. (Microphones such as the SR314 and SR40V shield the tip within their capsule, and are thus more durable.)

## TROUBLESHOOTING

If you encounter issues while using your Earthworks Audio microphone, please make sure that:

- Your microphone is connected to an active power supply.
- Phantom power is being supplied to the microphone.
- Your microphone and XLR cable are well connected.
- The microphone is positioned at an appropriate distance from the sound source.
- External noise in your recording environment is kept to a minimum.
- Your recording space is at room temperature and free of dust.

If your issue persists after checking, please contact us via our website.

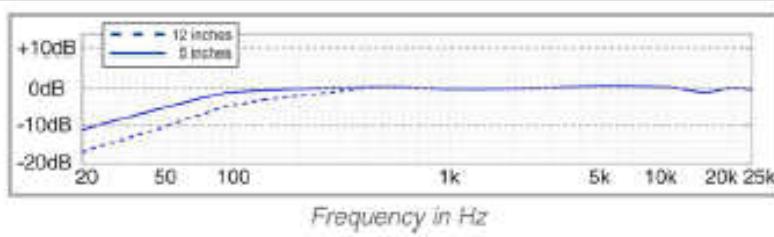



## SPECIFICATIONS

### Frequency Response

20Hz - 20kHz  $\pm 2$ dB at 30cm

### Polar Pattern

Cardioid

### Sensitivity

10mV/Pa

### Power Requirements

24-48V Phantom, 10mA

### Peak Acoustic Input

145dB SPL

### Output

XLR-3

### Minimum Output Load

65 $\Omega$ , balanced between pins 2 & 3

### Minimum Output Load

600 $\Omega$ , balanced between pins 2 & 3

### Noise


20dB SPL (A weighted)

### Dimensions


165 x 22 mm (6.5 x .860 in.)

### Weight

160g (.35lb)

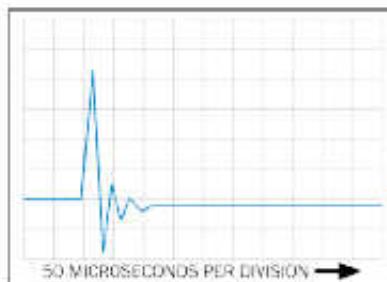

Impulse Response of SR25 (typical)

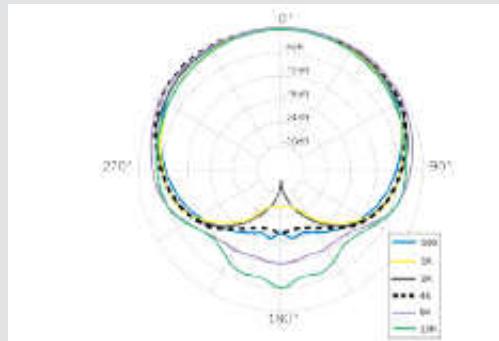

Polar Response of SR25 (typical)

## WARRANTY

All Earthworks® products carry a limited warranty (parts and labor). Please register your warranty at: [earthworksaudio.com/register](http://earthworksaudio.com/register). If you have any problems with your Earthworks products, please contact our warranty/repair department by email at: [service@earthworksaudio.com](mailto:service@earthworksaudio.com).

## NOTE

This warranty only applies to Earthworks microphones purchased brand new. For microphones purchased/received second-hand, please contact us via our website.